

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number  
**WO 2005/068945 A1**

(51) International Patent Classification<sup>7</sup>: **G01F 11/20**,  
B01F 13/10

(74) Agent: **GARAVELLI, Paolo**; A.Bre.Mar. S.r.l., Via Ser-  
vais 27, I-10146 Torino (IT).

(21) International Application Number:  
PCT/IT2004/000578

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(22) International Filing Date: 22 October 2004 (22.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
TO2004A000012 13 January 2004 (13.01.2004) IT

(71) Applicant (*for all designated States except US*):  
**NORDIMPIANTI TECHNOLOGIES S.R.L.** [IT/IT];  
Viale Industria 11, I-12051 Alba (IT).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SACCHET, Alessan-  
dro** [IT/IT]; c/o Nordimpianti Technologies, S.R.L.,  
I-12051 Alba (IT).

[Continued on next page]

(54) Title: DYE METER

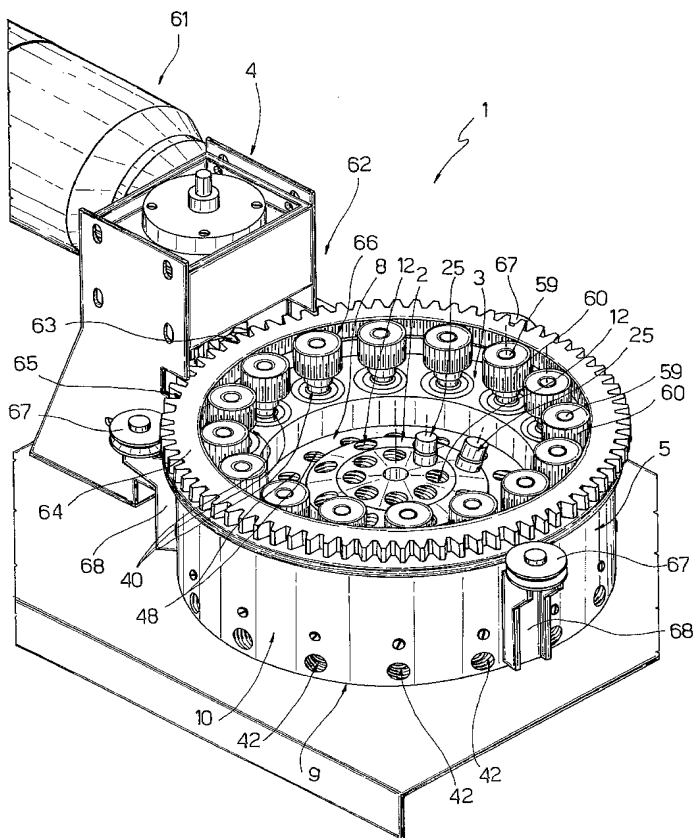

(57) Abstract: A dye meter (1) is disclosed that is equipped with an assembly (2) for dispensing a plurality of components for making dyeing compositions, a pumping assembly (3) for supplying the dispensing assembly (2), and circuit means (21, 23) for a fluidic connection between the dispensing assembly (2) and the pumping assembly (3); the dispensing assembly (2) comprises a support body (5) defining a plurality of nozzles (7) for delivering respective components; the pumping assembly (3) comprises a plurality of pumps (40) housed into respective seats (41) obtained in the support body in such a way that the circuit means are defined by holes obtained in the support body itself.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*